


KWS6206BP06

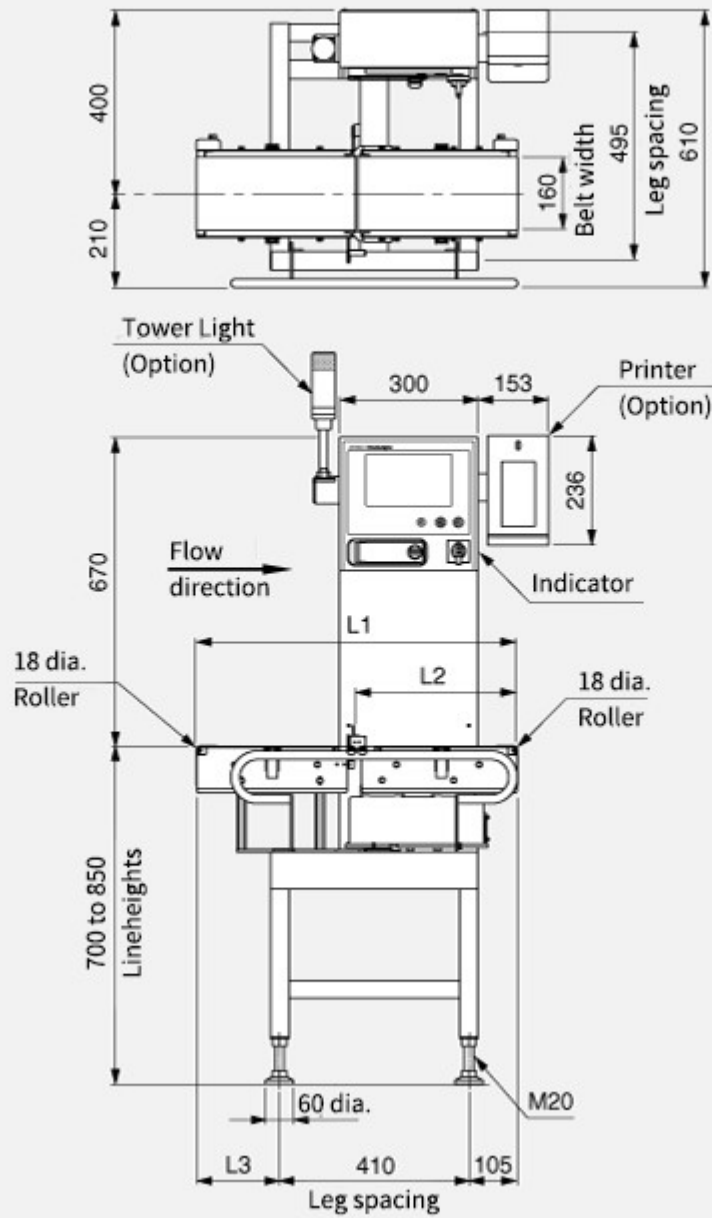

Units : mm

■ Specifications

Model	KWS6206BP06	
Weighing range	1.2 to 600 g	
Scale interval	0.01 g	
Maximum speed ¹	320 products/min	
Maximum accuracy (3 σ) ¹	+/- 0.015 g	
Display	8.5-inch color TFT LCD	
Operation method	Touch panel (Start, Stop, and Home are direct push buttons)	
Indication range	600.9 g	
Preset memory	Maximum 200	
Classification	2 or 3	
Product size ²	Width W	20 to 160 mm
	Length L	46 to 320 mm
	Height H	5 to 320 mm
Belt speed	15 to 120 m/min	
Power requirements	100 to 120 Vac +10% -15% or 200 to 240 Vac +10% -15%, single phase, 50/60 Hz, 200 VA, rush current 30 A (typ.) (20 ms or less)	
Mass	60 kg	
Environmental conditions	0° to 40° C (variation not to exceed 5° C/h to maintain accuracy), relative humidity 30% to 85% non-condensing	
Protection class	IP30 compliance	
Exterior	Stainless steel (SUS304) (excluding some parts)	
Data output	USB port (USB2.0), Ethernet interface (10BASE-T, 100BASE-TX)	

1: The speed and accuracy vary according to the products to be weighed and the rejector.

2: The size of products to be weighed depends on the rejector; select a checkweigher together with a rejector. Consult us about semi-transparent and transparent products.

Note: The noise level of the checkweighers does not exceed 70 dB (A).

Model Selection List

The SSV series is available in a variety of models to suit a wide range of products. For details of detection areas, please submit an online inquiry form.

(High Accuracy model) SSV-h series

Model	Weighing range (g)	Maximum accuracy (g)	Maximum speed (products/min)	Belt speed (m/min)	Product size		
					Width (mm)	Length (mm)	Height (mm)
KWS6001B△04	0.4 to 100	+/- 0.01	600	15 to 99	20 to 100	46 to 120	5 to 120
KWS6003B△03	0.4 to 100	+/- 0.01	310	15 to 92	20 to 100	46 to 230	5 to 230
KWS6005B△05	0.4 to 100	+/- 0.01	310	15 to 92	20 to 160	46 to 230	5 to 230
KWS6006B△06	0.4 to 100	+/- 0.01	320	15 to 120	20 to 160	46 to 320	5 to 320
KWS6201B△04	1.2 to 600	+/- 0.015	600	15 to 99	20 to 160	46 to 120	5 to 120
KWS6203B△03	1.2 to 600	+/- 0.015	400	15 to 120	20 to 100	46 to 230	5 to 230
KWS6205B△05	1.2 to 600	+/- 0.015	400	15 to 120	20 to 160	46 to 230	5 to 230
KWS6206B△06	1.2 to 600	+/- 0.015	320	15 to 120	20 to 160	46 to 320	5 to 320
KWS6411B△11	6 to 3000	+/- 0.1	400	15 to 120	20 to 250	60 to 230	5 to 230
KWS6412B△12	6 to 3000	+/- 0.1	320	15 to 120	20 to 250	60 to 320	5 to 320
KWS6414B△12	6 to 3000	+/- 0.1	220	15 to 120	20 to 250	60 to 450	5 to 450
KWS6416B△16	6 to 3000	+/- 0.1	270	15 to 120	20 to 350	60 to 350	5 to 350
KWS6417B△17	6 to 3000	+/- 0.1	220	15 to 120	20 to 350	60 to 450	5 to 450

The speed and accuracy vary according to the products to be weighed and the rejector.

△: The alphabet letter indicating the exterior type.